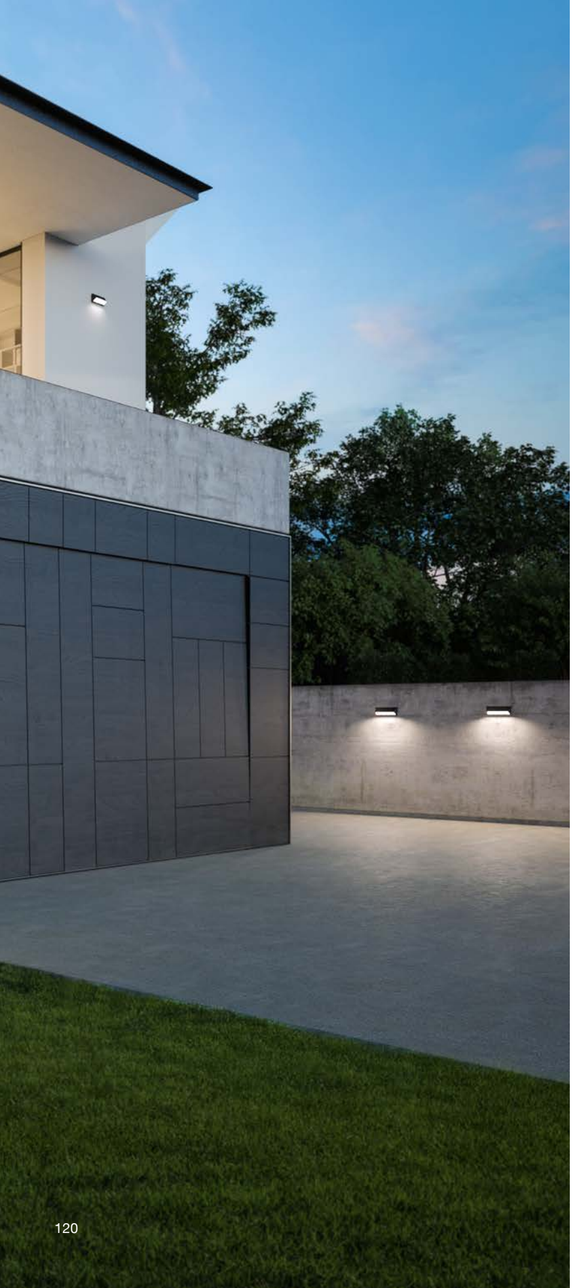


Wall luminaires
with directed light

A series of wall mounted luminaires available with two different light outputs. The high output wall luminaires are ideally suited for areas requiring higher degrees of illuminance. The location luminaires can be utilized at lower mounting heights to illuminate pathways for safety and egress purposes.


Die-cast aluminum · Matte safety glass
Reflector made of pure anodized aluminium


LED color temperatures: 2700 K, 3000 K, 3500 K, 4000 K


BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

NRTL listed to North American standards · Suitable for wet locations
Protection class IP 65



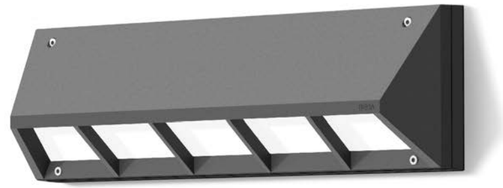





Location luminaires

		LED	A	B	C
22 172	ADA	2.0 W	7⅛	4¾	3
22 174	ADA	3.9 W	11⅞	4¾	3⅛
22 175	ADA	5.9 W	15¾	4¾	3⅛

Wall luminaires

		LED	A	B	C
22 375	ADA	6.1 W	7⅛	4¾	3
22 385	ADA	12.3 W	11⅞	4¾	3⅛
22 395	ADA	18.4 W	15¾	4¾	3⅛