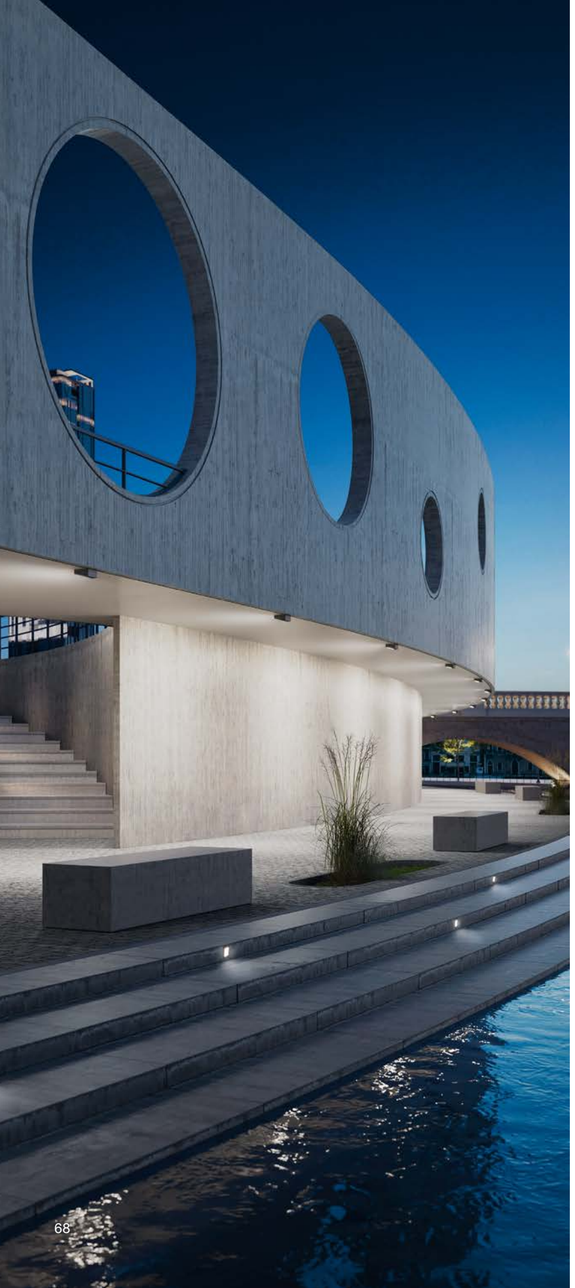


Wall washers
Asymmetric

A series of square surface mounted wall washers with an asymmetric wide beam light distribution. These luminaires are designed for the illumination of walls in corridors and covered pedestrian walkways.

Die-cast aluminum · Matte safety glass
Reflector made of pure anodized aluminum

LED color temperatures: 2700 K, 3000 K, 3500 K, 4000 K

BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

NRTL listed to North American standards · Suitable for wet locations
Protection class IP 65









Wall washers

	LED	A	B
24 089	19.7 W	6¾	3
24 090	40.0 W	9⅝	4